




THE RIGHT PRODUCT FOR YOU

## STM-Shrink

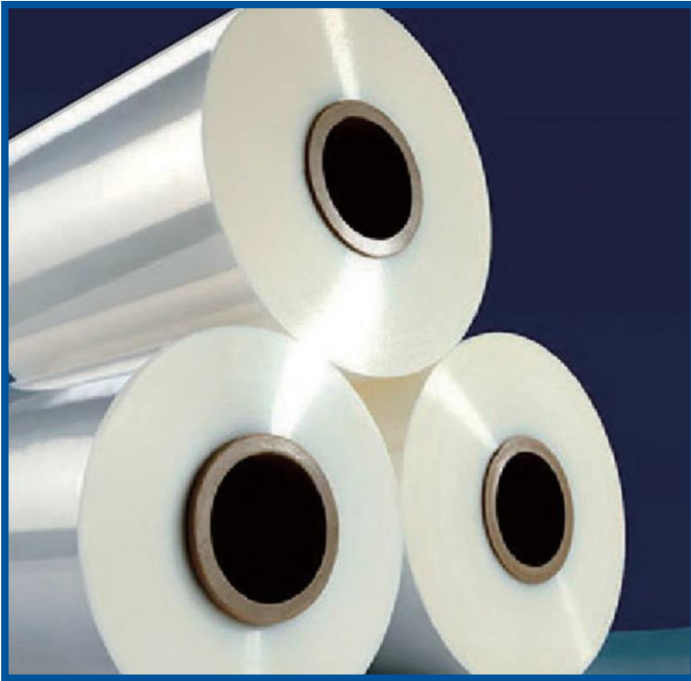

- High holding force
- Fast packaging speeds
- High tensile strength with impact resistance
- Great tear resistance
- Good melt rate and draw down ability

### PRODUCT DESCRIPTION

STM-Shrink offers excellent shrinkage, burn through resistance, strong seals, a wide range of temperature for sealing, and has outstanding puncture and tear resistance. This shrink produces much less odor during heating and sealing than traditional products.

Cross-linked polyolefin increases its strength without sacrificing clarity. Polyolefin is also 100% recyclable, making it the "green" choice.

### STM-SHRINK

### TYPICAL APPLICATIONS

Used to bundle package for transport and storage of packaged food, beverages and non-food products, electrical and electronics, home appliances.

### SPECIFICATION

Color:	Clear
Film Material:	Polyolefin
Total Thickness:	0.600 mil
Density:	0.93g/cm3
Tensile Strength:	>12Mpa
Shrinkage Temperature:	302 °F - 428 °F

Part Number	Width (in)	Thickness (mil)	Length (ft)	Inner Diameter (mm)	Net Weight (kg)	Shrinkage Rate (% Distance)	Breaking Elongation (%)
SHRINKFILM-60-12X1458	12	0.600	4375	76	4.16	TD 5% - 55%	200

800-545-8273 | [specialtytapes.net](http://specialtytapes.net)

sales@specialtytapes.net | Fax: 262-835-0749 | STM 4221 Courtney Road, Franksville, WI 53126 USA